


S7801-54XS

Data Center ToR Switch

Next generation cloud service applications not only consume more data, it requires service providers to build more flexible, agile and scalable networks in order to meet the increasing demands of their customers. The S7801-54XS is a white box data center switch with open network capabilities. It is a high quality switch that provides data centers with a rich set of features, multiple protocol support, and run-time programmability, which will enable high switching performance in the most demanding environments. Designed with a small form factor and high-density configurations, the S7801-54XS can be positioned as a ToR (Top-of-Rack) or leaf switch to enable versatile connectivity and traffic management.

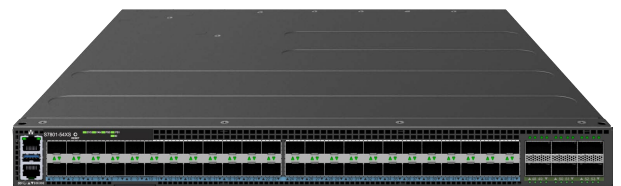

KEY BENEFITS

- Monitoring link status to re-assign traffic flow dynamically
- Optimization for the east-west traffic pattern
- Flexible and efficient data processing
- Centralize and adaptive packet memory management architecture
- On-chip packet buffers minimize the data latency
- Dynamic load balancing enhances ECMP
- Enhanced network telemetry with programmable support
- Enable real-time network status visibility
- Versatile connectivity as a data center leaf or ToR.

KEY FEATURES

- High density 48 x 10G + 6 x 100G service interfaces
- 1.28Tbps switching capacity
- Intel® Denverton 4-Cores
- Broadcom Trident3-X5 Silicon
- Individual BMC for monitoring and managing equipment health status
- Hot swappable power supplies with 1+1 redundancy support
- Hot swappable fan modules with 4+1 redundancy support

SPECIFICATIONS

PHYSICAL

♦ 6 x 40/100G QSFP28 ports	
♦ 48 x 1/10G SFP+ ports	
♦ 1 x 100/1000M RJ45 management port	
♦ 1 x RJ45 serial console port	
♦ 1 x USB 3.0 Type-A port	
Processor	Intel Denverton 4-Core @ 1.6GHz
Memory	8GB DDR4(Up to 32GB)
Storage	32GB SSD
ASIC	Broadcom Trident3-X5 BCM56771
BMC	AST2620
LED	Power and System status LEDs per unit Link and Activity LEDs per port FAN Status LED per FAN PSU Status LED per PSU ID LED per unit
Chassis (WxDxH)	1RU, 440 x 440 x 43.8 mm or 17.32" x 17.32" x 1.72" Weight: 8.9kg or 19.62lbs (Without FRU)
Redundancy	Hot swappable, 1+1 redundant PSU Hot swappable, 4+1 redundant Fans

S7801-54XS

Cloud & Data Center Solutions

ENVIRONMENTAL

Power Specs.	AC input: 100 to 240V, 6A
	DC input: -36 to -75V, 16A
	Typical power: 111.3 Watts (no transceiver)
Max. Operating Specs.	Operating temperature: 0°C to 45°C (32°F to 113°F) Operating humidity: 5% to 95% (RH), non-condensing
Max. Non-Operating Specs.	Storage temperature: -40°C to 70°C (-40°F to 158°F) Storage humidity: 5% to 95% (RH), non-condensing

PERFORMANCE


Switching Capacity	1.28 Tbps
Packet Buffer	32 MB

REGULATORY COMPLIANCE

Safety	UL 62368-1 IEC 62368-1	EMC	FCC Part 15, Subpart B, Class A ICES-003, Class A EN 55032, Class A EN 300 386 EN 55035 VCCI CISPR 32, Class A MTCTE
	Environment	WEEE	

Specifications are subject to change without notice.
Contact our sales team for current configuration options.

S7801-54XS Front and Back Views

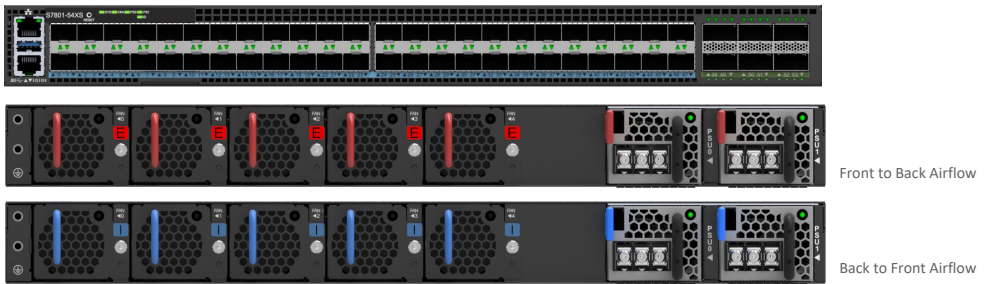

ACCESSORIES

- Compatible Transceivers Types
10G SFP+ SR, 10G SFP+ LR, 10G SFP+ ER, 100G QSFP28 SR, 100G QSFP28 LR, 100G QSFP28 ER
- Available to Order
- Power Supply Types
PSU-401-DESR, 400W DC, exhaust air flow
PSU-401-DISB-1, 400W DC, intake air flow
PSU-401-AESR, 400W AC, exhaust air flow
PSU-401-AISB, 400W AC, intake air flow
- Fan Types
FAN-402825-HD, exhaust air flow
FAN-402825-CD, intake air flow

